

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 20 TOWNSHIP 14 RANGE 4

DATE: -12-7-03 4-17-08

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 3-8-99

IN. S.P.C. E ZONE NAD '83

NAME: 14042008

N: 487164.4251(m)

E: 61852.4153(m)

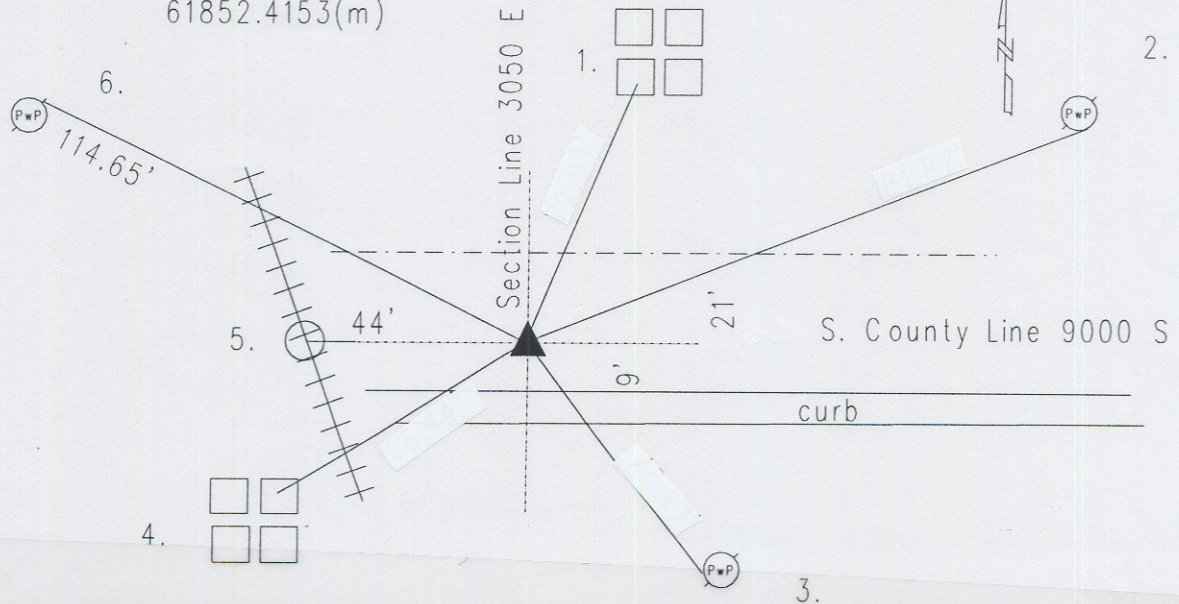

Corner originally set as a post in 1820 by John Hendricks with the following witnesses: 24" white oak bearing south 73 degrees, thence west 19 links; and a 18" ash bearing north 58 degrees, thence east 22 links. (M.C. Atlas p.9) A survey by D.B. Hasbrook on June 10, 1851 indicates no stone but the following witnesses: 24" white oak bearing south 65 degrees, thence east 126 links. (Perry Legal Book p. 24) Corner referenced by Miller on 7/15/75 and called a road nail. Corner referenced by Wilcoxon on 5/16/85 and called a large road nail. Corner referenced by Whiteside on 3/13/96 and called a mag nail set. Corner was excavated on 3/4/99 by Whiteside and a #205 cast iron Harrison monument was set in position as the corner. Corner was excavated again on 12/7/03 by Wilcoxon and a #205 cast iron Harrison Monument was set in position as the corner.

14042008

REF.	DISTANCE	DESCRIPTION
1.	72.93'	Cut 'x' SW bolt of railroad crossing sign base
2.	81.75'	Mag nail w/brass washer SE PwP#214-821 15" up
3.	45.58'	Mag nail W PwP#833-3708 72" up (slope distance)
4.	66.55'	Cut 'x' NE bolt of railroad crossing sign base
5.	44'	Due W to railroad
6.	114.65'	Mag nail w/brass washer NE PwP#221-821 15" up